




Attaching the CAM Straps

Here is a step by step guide for fitting the CAM straps around the HOTBIN. When both parts are completed, your HOTBIN should look like the image above.

Part One: Creating the Loop

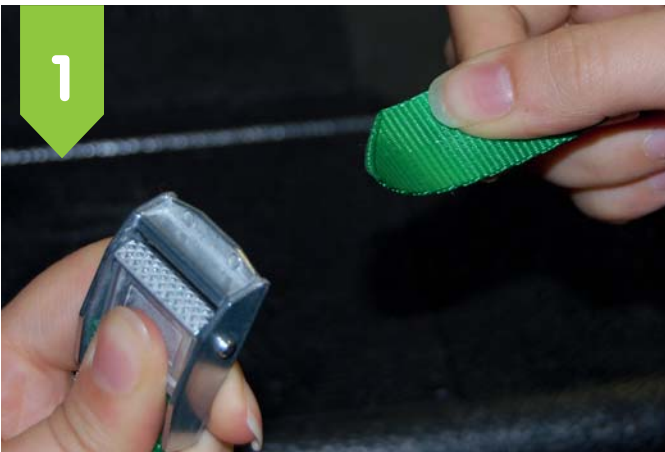

1. Ensuring the strap is not twisted, press down on the CAM strap clasp to open the buckle enough to thread through the strap.



2. Thread the loose end of the strap through the gap from the underside of the buckle.



3. Pull the strap through the buckle whilst still holding the clasp down.



4. Release the clasp as soon as around 15cm (6 inches) has been pulled through. The teeth on the clasp will then hold the strap in place.

Part Two: Fixing the CAM Straps In Place

Here we show the "hug and drop" method of fixing the straps around the HOTBIN.



1. Once the strap has created a loose loop, put the strap over the top of the HOTBIN.



2. Tighten the strap at the top of the HOTBIN by opening the clasp and pulling the strap through.



3. Gradually manoeuvre the strap down by wiggling it and keeping the unit the strap taut against the back of the unit.



4. Located on the HOTBIN hatch are **two** slight square indentations, which show the ideal positions for the straps to sit.



5. Position the straps in place by gradually lowering them down to the square guides.



6. Tighten the straps fully by pulling on the loose strap and opening the clasp if this helps. Tuck the loose end behind the tightened strap.



All done! The straps will sit securely in place. When removing the hatch, loosen the straps to sit above or below the hatch and then simply wriggle them back and tighten when done.